


MULTILIFT OPTIMA 20S



Technical data

Type	OPTIMA 20S				
Vehicle type	3 axle				
GVW of the vehicle (t)	26				
Capacity (t)	20				
G-length	46	51	53	56	59
System weight (kg) *	1775	1855	1945	1965	1995
Tipping angle (°)	50	49	52	52	53
Max. operating pressure (MPa)	31.5				
Recommended oil flow (l/min)	80				

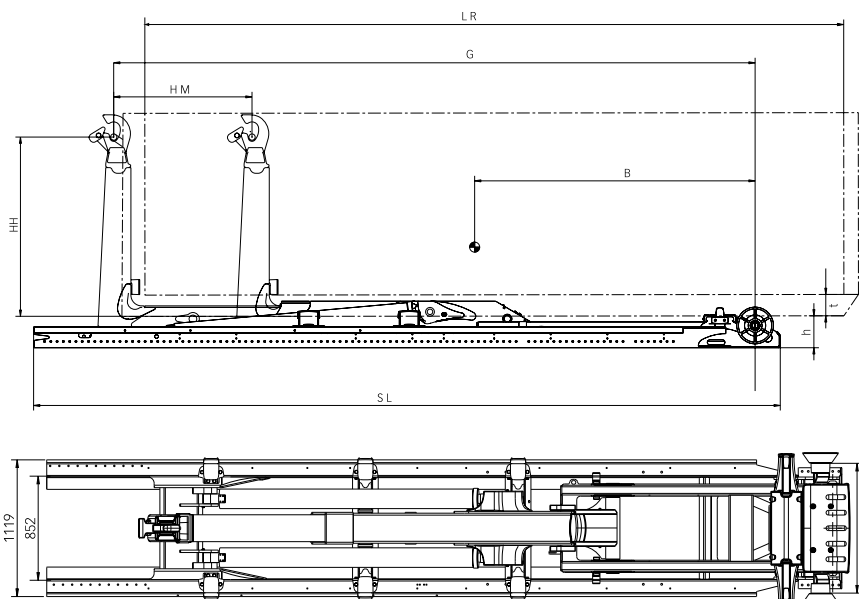

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local MULTILIFT dealer.

Primary dimensions

Model	OPTIMA 20S.46	OPTIMA 20S.51	OPTIMA 20S.53	OPTIMA 20S.56	OPTIMA 20S.59
LR = Body length (min – max) internal (m)	4.0 – 5.6	4.3 – 6.1	4.5 – 6.4	4.5 – 6.6	4.7 – 7.0
SL = Subframe length (mm) **	5308	5758	6508	6508	6508
B = Centre of gravity (mm)	2450	2700	2850	2950	3000
G = Exact G-length (mm)	4600	5100	5380	5580	5880
HM = Horizontal movement (mm)	900	1100	1100	1300	1450
h = Installation height (mm)	230				250
t = Min. Free tunnel height (body) (mm)				125	
HH = Hook height (mm)				1570	

© BD-Optima20S-EN-DIN_160219



www.multilift.com

Sales contact

Cargotec Finland Oy
 Nesteentie 36, P.O.Box 39
 FI-21201 Raisio, Finland
 tel. +358 204 55 2399
 fax +358 204 55 2231
 www.hiab.com